

PTK2350 BIN ACTIVATOR


Bin Activators are equipment conically shaped that aid dry bulk material flow from storage silos, or hoppers.

DATASHEET

CONSTRUCTION MATERIALS		FORCE	POWER	POWER SUPPLY	WEIGHT
<ul style="list-style-type: none"> •ST37 Carbon Steel •AISI304 Stainless Steel 	<ul style="list-style-type: none"> •Hardox Steel •AISI316 Stainless Steel 	13640 N	0,7 kW	380 V AC 50 Hz, 3 Phase, IE2	1409 kg

NUMBER OF OUTLETS	NUMBER OF DAMPERS	NUMBER OF MOTORS	FEATURES
1	16	2	Counter flange Polyurethane flexible joint

DIMENSIONS

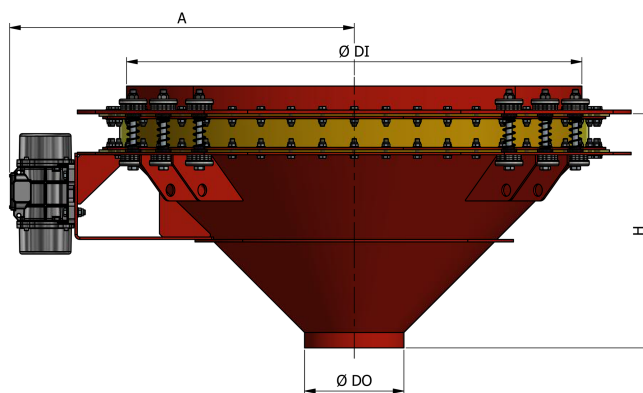

A (mm) : 1595
Ø DI (mm): 2330

Ø DO (mm) : 406
H (mm) : 1150

TECHNICAL DRAWING

